


Installation Planning

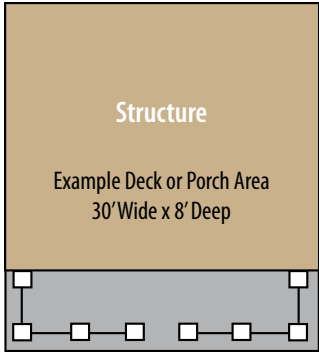

Installation Examples

- 6 - 6'W railing sections
- 6 - packages of attachment fittings
- 8 - Posts or Columns
- 1 - Gate (optional)

Specification	Summit/Fairfield	Midway
Material	6065 Aluminum Alloy	
Spindle	5/8" x 5/8"	1/2" x 1/2"
Open Spacing	<4"	<4" or <6"
Rails	2-1/2" Wide	1-1/2" Wide
Posts	2-1/2" Square	1-1/2" Square
Finish	Powder Coat	

Limited lifetime warranty


In normal use, we warrant our products against defects in Gilpin supplied materials and workmanship for as long as you own them, normal wear and tear expected. For details go to www.gilpininc.com

Determining your needs

After you have measured installation area, use this chart to record items you will need for installation.

Item	Qty.

Aluminum Railing Styles

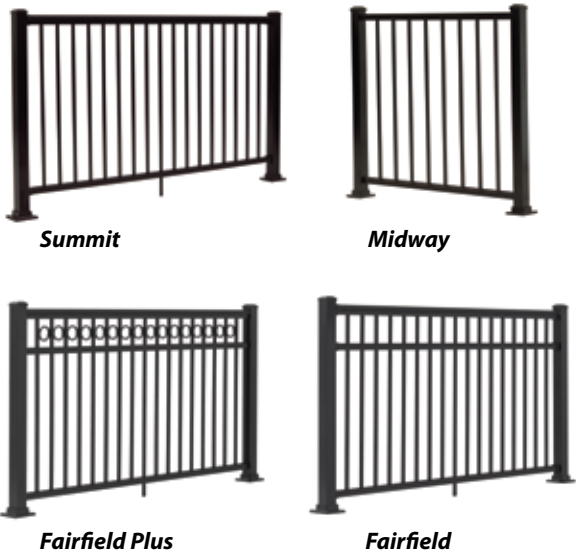

Specifications & Installation

Aluminum Railing Specifications

- Summit and Fairfield railing are 2-1/2" wide with <4" space between spindles and installed heights of 36" or 42". Rivet covers included for clean finished look.
- Midway railing is 1-1/2" wide (4" or 6" spacing available) and has a 36" installed height
- Durable and long lasting.
- Aluminum railing is weather resistant.
- Posts, panels and installation options sold separately.

Black = B

White = W

All colors applied with high quality powder coat

When ordering, place color code (B or W) at end of part number to indicate color choice.

Posts

Posts are engineered to work above ground (flanged) or below ground (without flange) to secure the railing installation.

Installation Options



Installation Spindle

Individual spindle is screwed onto post. Railing section mounts over installation spindle.



Wall Mounted Fitting

Brackets are mounted on post with screws and railing section slides into bracket.

Vertical/Horizontal Swivel Fitting

Used when angle is required when adjusting sections for slopes, stairs or horizontal angles.

Column & Accessories

Column

The beauty of a railing installation is enhanced by the right column

Gilpin Inc designs its aluminum column to decorate and enhance your home. Column coordinates with Midway railing.



Accessories

Add beauty to your installation

Depending on the style you choose for your aluminum railing installation, a variety of decorative accessories are available to beautify your selection.



Item

* Hand Rail (48"W)	Butterfly Scroll (Summit only)
* Hand Rail (60"W)	Spindle Flange (5/8")
* Hand Rail (72"W)	Spindle Flange (1/2")
Decorative Rail End (2 pk)	Lamb's Tongue
Wall Support Brackets	Ball Cap (2-1/2" post)
Swivel Bracket (2 pc. pkg.)*	Estate Scroll (Summit only)

* Requires wall support bracket to secure properly



Always Check The Following Before Starting Any Railing Installation

- Home owner association (associations may restrict the size and/or style of railing)
- * Local building codes
- Zoning requirements
- Some building codes require:
Porch, balconies or raised floor surfaces more than 30" above the floor or grade, railing must have 4" spindle spacing and be at least 36" in height.

** Compliance with building codes is the installer's responsibility*



Summit, Midway, Fairfield, Fairfield Plus, Gilpin Inc logo and name are all trademarks or registered trademarks for Gilpin Inc ornamental aluminum products.



1819 Patterson Street • 1-800-348-0746

Fax 260-724-9849

www.gilpininc.com • sales@gilpininc.com



To review our full line of steel and aluminum products, please request a brochure by phone or through our website.



.....Railing sections completely assembled.....
Easy do-it-yourself installation.....
Weather resistant and durable.....
Four styles and two colors.....
Slants for steps.....